

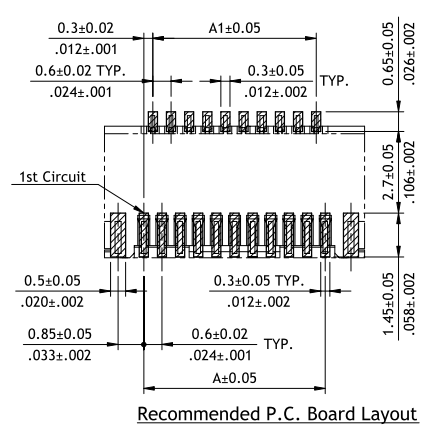


**CF30 Series 0.30mm(.012") SMT One-Touch FPC Connectors**

- ⊙ 1.25mm above the board
- ⊙ FPC low insertion force and high retention force
- ⊙ Insulator: High temperature plastic UL 94V-0, Color Nature
- ⊙ Cover: High temperature plastic UL 94V-0, Color Black
- ⊙ Designed easy for FPC installation and reliable operation
- ⊙ With metal fixed tabs to secure connector in place
- ⊙ Accepts 0.2mm thick FPC


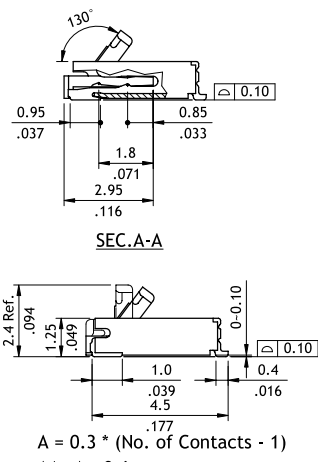


P/N CF30\*\*2D0RA

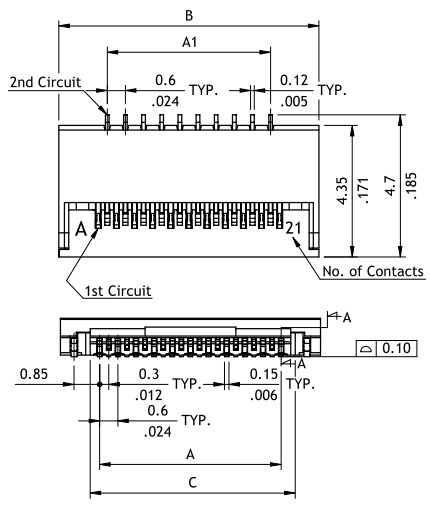

A = 0.3 \* (No. of Contacts - 1)  
 A1 = A - 0.6  
 B = A + 2.6  
 C = A + 0.63

P/N CF30\*\*2D0RB

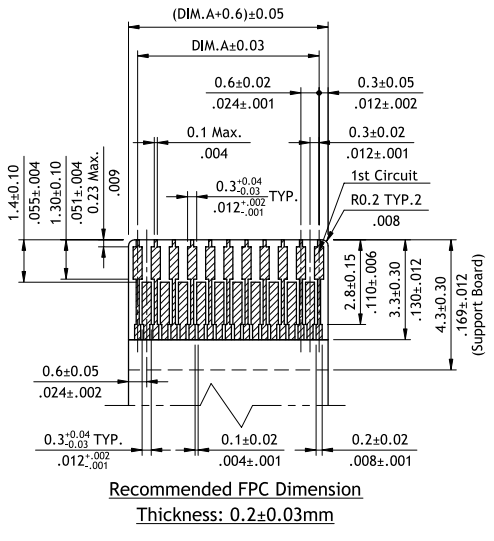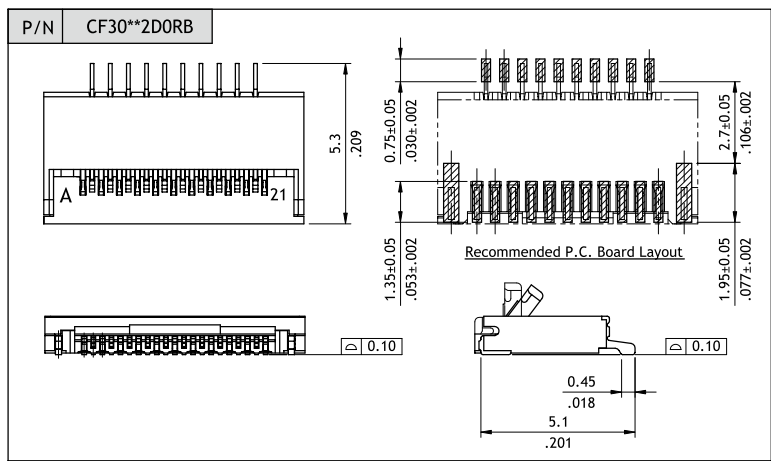

**Ordering Code**

**1** **CF30** **2** **45** **3** **2** **4** **D** **0** **5** **6** **R** **7** **A** **8** **-NH**

- 1** Series No.
- 2** Circuits: 11 to 45  
 (Available: 11,15,17,21,23,25, 27,31,33,35,37,39,45)  
 \*Circuits not found above please consult manufacturer\*
- 3** Plating code:  
 2 = Gold flash over Nickel
- 4** Contact style:  
 D = Downside contact
- 5** Color: 0 = Nature
- 6** Packing:  
 R = Tape & Reel
- 7** Other Options:  
 A = Lead-Less Type, B = Lead Type  
 \* Special options consult manufacturer
- 8** -NH = For Lead Free soldering process and Halogen-Free  
 \* Empty code 8, if requesting non Halogen-Free material